

LOW OPTICAL ABSORPTION MEASUREMENT REPORT

SAMPLE: SAMPLE

Request from		Testing institute	
Address	Company	Address	UAB Lidaris
	Address Line 1		Saulėtekio al. 10
	Address Line 2		10223 Vilnius
	Country		Lithuania
Contact person	Name Surname	Tester	Name Surname
Inquiry ID	0001	Sale order	SO0001
Purchase order	-	Test ID	-
		Test date	01/01/2025

Specimen

Name	Sample
Front surface (S1)	HR Dielectric Coating
Rear surface (S2)	AR Coating
Dimensions	Ø25.4 x 6.4 mm
Packaging	Wrapped in paper
Storage before test	Normal laboratory conditions
Dust blow-off	Canned air
Cleaning	None

Measurement

Method	Photothermal common-path interferometry (PCI)
Regime	Transmission
Protocols	Longitudinal scan (L-scan), Time scan, Transverse scan (T-scan).

SUMMARY OF MEASUREMENT RESULTS

Wavelength	AOI	Polarization	Location	Sample absorption *
1070.0 nm	(2.0 ± 1.0) deg	Linear P	Front surface (S1)	3600 ⁺⁷⁰ ₋₄₆ ppm

* Sample absorption is evaluated from Transverse scan protocol.

TEST EQUIPMENT

Definitions and test description

Photothermal common-path interferometry (PCI) for low absorption measurements is based on spatially resolved pump-probe technique: low power probe beam senses the heating effect of an absorbed pump beam ¹. Several different scanning protocols are performed to measure the absorption of the sample.

Irradiation sources	Pump laser	Probe laser
Manufacturer	IPG Photonics	Lumentum
Model	YLR-10-LP	1122P
Type	Continuous wave Ytterbium fiber	Continuous wave HeNe
Central wavelength	1070 nm	632.8 nm
Angle of incidence	(2.0 ± 1.0) deg	(9.0 ± 1.0) deg
Polarization state	Linear P	Linear S
Spatial beam profile in target plane	TEM00	TEM00
Beam diameter in target plane (1/e ²)	(65 ± 5) μm	(210 ± 5) μm
Average power	(3.979 ± 0.024) W	(100 ± 1) mW

Measurement setup calibration	Surface
Calibration sample	UVFS Reference Surface Sample
Absorption	24.7 %
Correction factor	1.0
Responsivity	(24.4 ± 0.2) 1/W

Power meter

Manufacturer	Ophir
Model	3A-PF-12
Calibration due date	2027-12-31

Test environment

Environment	Air
Cleanroom class (ISO 14644-1)	ISO7
Pressure	1 bar
Temperature	24 C
Humidity	30 %

¹A. Alexandrovski, M. Fejer, A. Markosian, and Roger Route "Photothermal common-path interferometry (PCI): new developments", Proc. SPIE 7193, Solid State Lasers XVIII: Technology and Devices, 71930D (28 February 2009)

LONGITUDINAL SCAN (L-SCAN) RESULTS

FRONT SURFACE (S1)

Scan parameters

Scanning axis	Longitudinal (from S1 to S2)
Scanning distance	6.0 mm
Scanning step	20 μ m
Pump laser power	(4.035 \pm 0.019) W
Number of scans	1

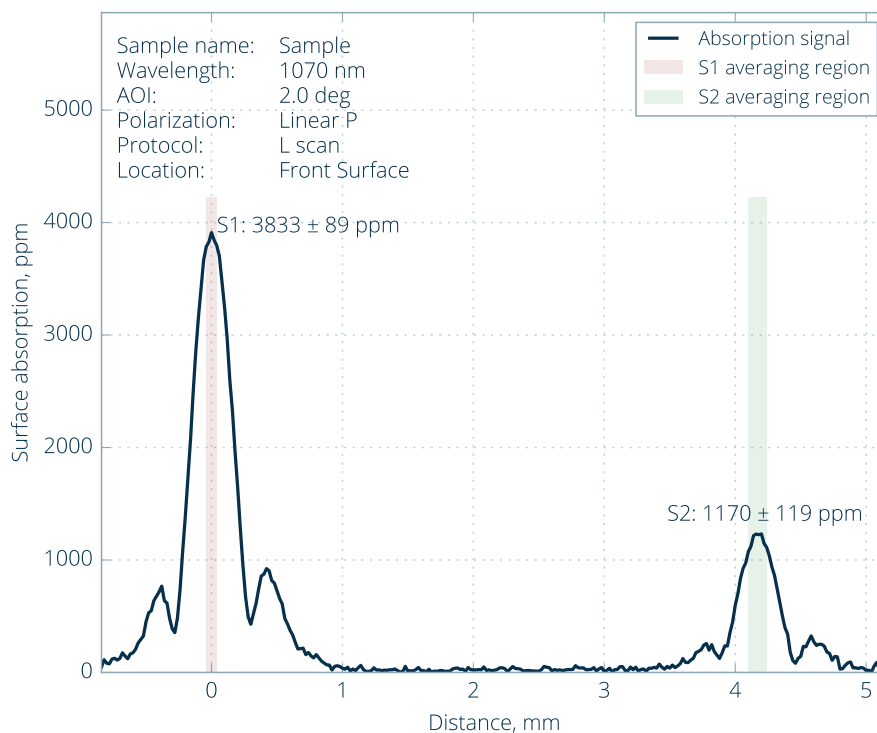


Figure 1. Longitudinal scan.

The central peaks, found at S1 and/or S2 positions, indicate the points where the pump and probe beams traverse the entrance (S1) and exit (S2) surfaces. The peak value of the signal corresponds to the surface absorptance, however, the secondary peaks (sidelobes) surrounding central peak should be regarded as part of the surface response function and lack any physical significance.

It's important to emphasize that the recorded scan distance between S1 and S2 is affected by refraction index of optical medium and therefore deviating from the actual physical thickness of the sample. The reported values are calibrated using a surface etalon sample. In cases where optical elements exhibit substantial bulk absorption, the longitudinal scan signal includes a central baseline that should be subtracted when estimating surface absorptance. The bulk absorptance portion of the signal necessitates a separate calibration process and should be interpreted separately.

Absorption values in L-scan figure are displayed only for comparison purpose, because absorption might change during the L-scan procedure. Temporal absorption changes can be seen in Time-scan results.

TIME SCAN RESULTS

FRONT SURFACE (S1)

Scan parameters

Scanning axis	Time
Scanning duration	626 s
Scanning step	1 s
Pump laser power	$(4.035 \pm 0.019) \text{ W}$
Number of scans	1

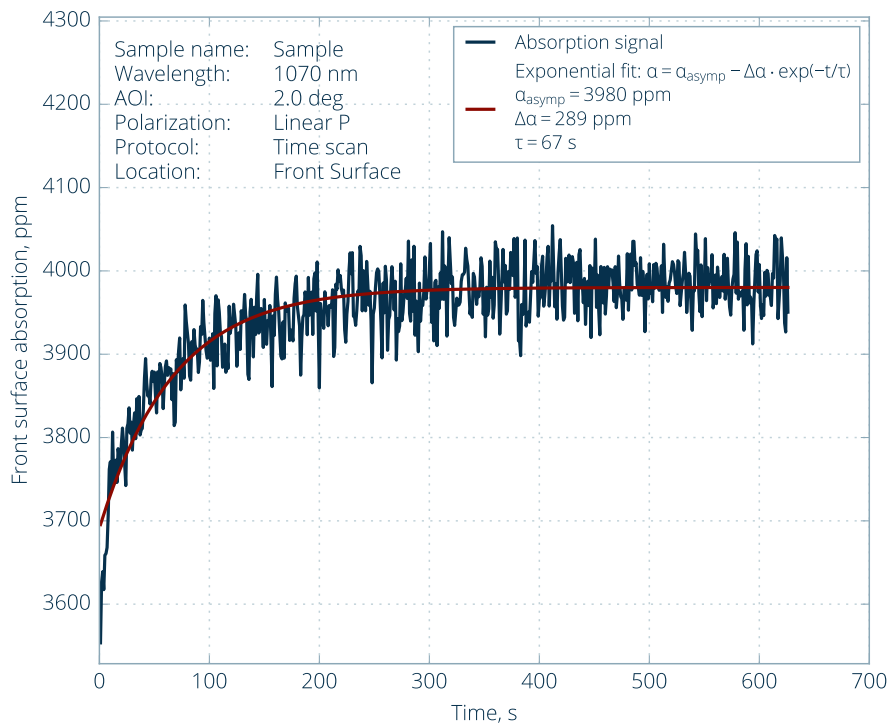


Figure 2. Time scan on front surface (S1) .

TRANSVERSE SCAN (T-SCAN) RESULTS

FRONT SURFACE (S1)

Definitions and protocol description

Sample absorption is defined as median absorption value of T-scan measurement. Uncertainty is evaluated as minimum and maximum absorption values of T-scan measurement without outliers, i.e. within range $[Q1 - 1.5 \cdot IQR, Q3 + 1.5 \cdot IQR]$, where Q1 - first quartile, Q3 - third quartile, IQR - interquartile range.

Scan parameters

Scanning axis	Transverse (vertical)
Scanning distance	3.0 mm
Scanning step	37 μ m
Pump laser power	(3.975 \pm 0.019) W
Number of scans	1

Scan results

Sample absorption 3600^{+70}_{-46} ppm

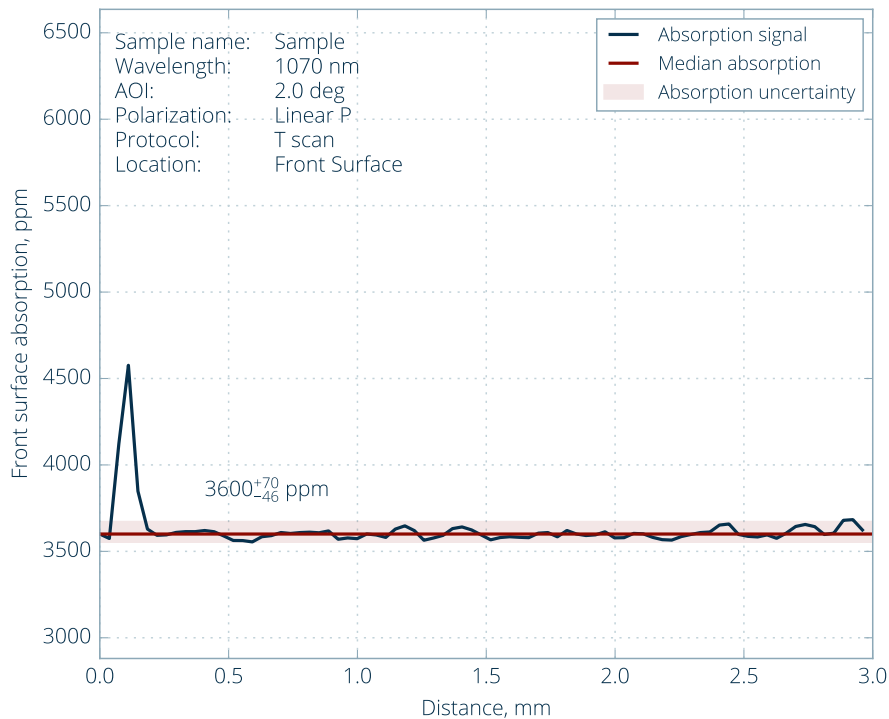


Figure 3. Transverse scan on front surface (S1) .

TESTING LOCATION FRONT SURFACE (S1)

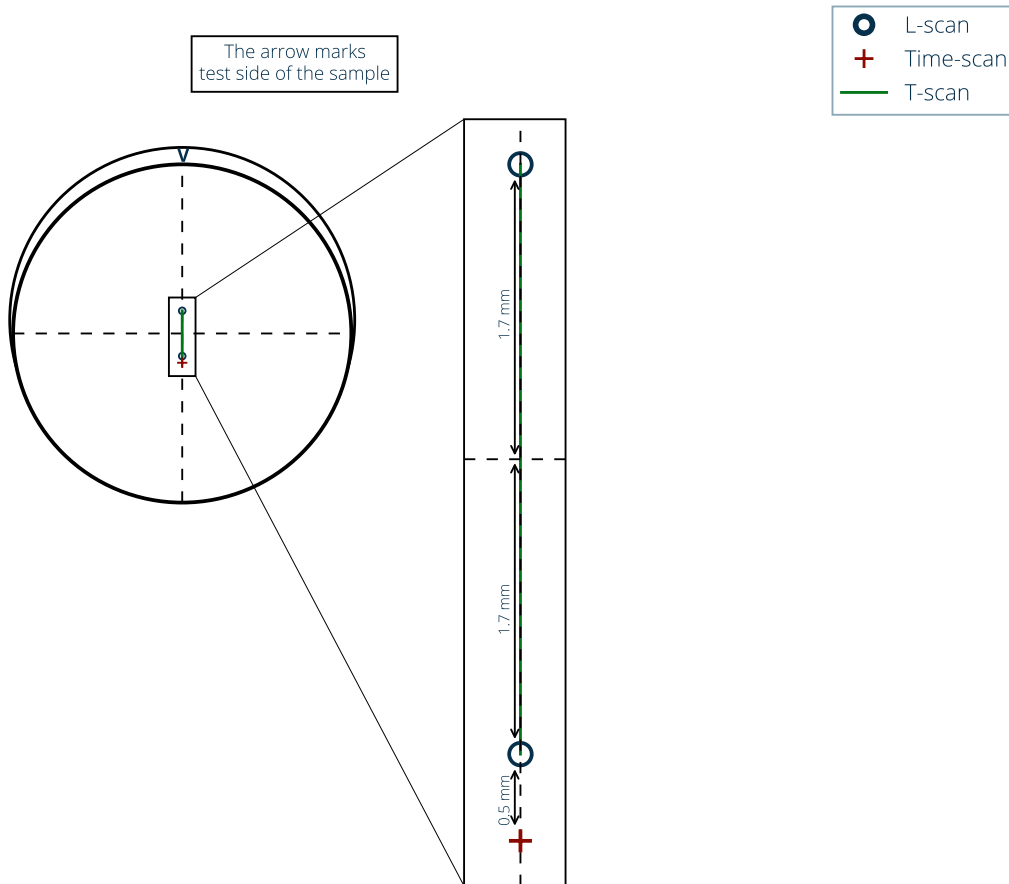


Figure 4. Measured sites on the sample.